

1" UMBRA COURTESY LIGHT

- Ideal for damp applications – IP66 rated
- Available with or without grommet



SPECIFICATIONS

UMBRA (NO GROMMET) SPECS

COLOR OUTPUT	PART NUMBER	VOLTAGE	CURRENT (mA)	WATTAGE (W MAX)	CCT (K)/ WAVELENGTH (nm)	LUMINOUS FLUX (lm)
White	471008	13.8	23	0.317	5565	7.375

UMBRA (WITH GROMMET) SPECS


COLOR OUTPUT	PART NUMBER	VOLTAGE	CURRENT (mA)	WATTAGE (W MAX)	CCT (K)/ WAVELENGTH (nm)	LUMINOUS FLUX (lm)
White	471009	13.8	23	0.317	5958	4

UMBRA (WITH GROMMET & PERMA SEAL CONNECTORS) SPECS


COLOR OUTPUT	PART NUMBER	VOLTAGE	CURRENT (mA)	WATTAGE (W MAX)	CCT (K)/ WAVELENGTH (nm)	LUMINOUS FLUX (lm)
Blue	480357	13.8	20	0.300	469	0.75

DIMENSIONS

TOP VIEW

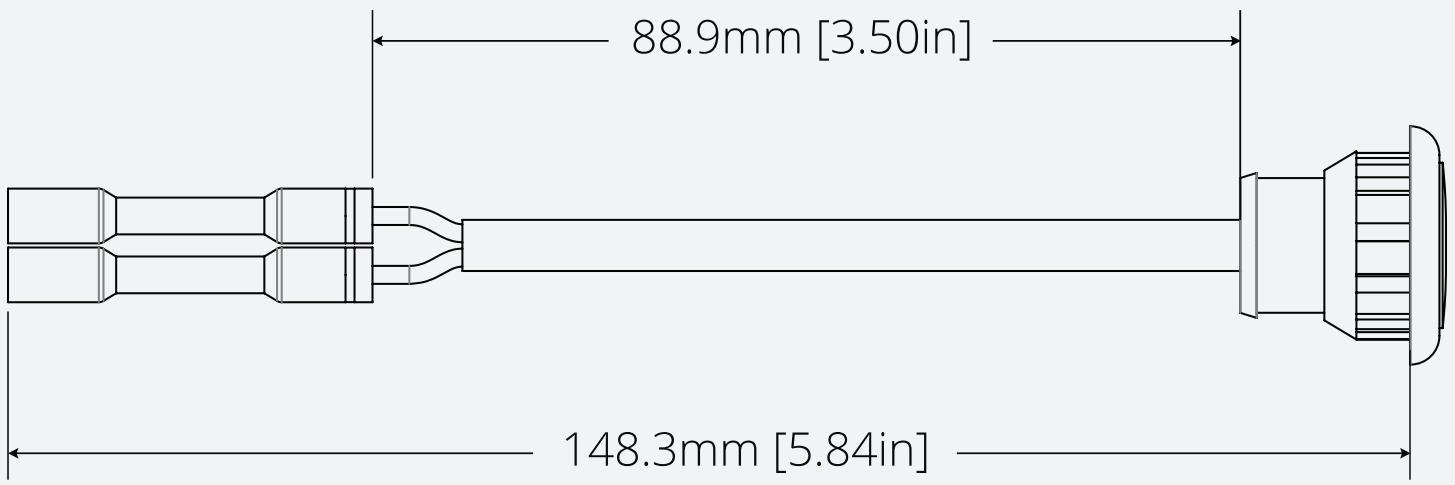

FRONT VIEW

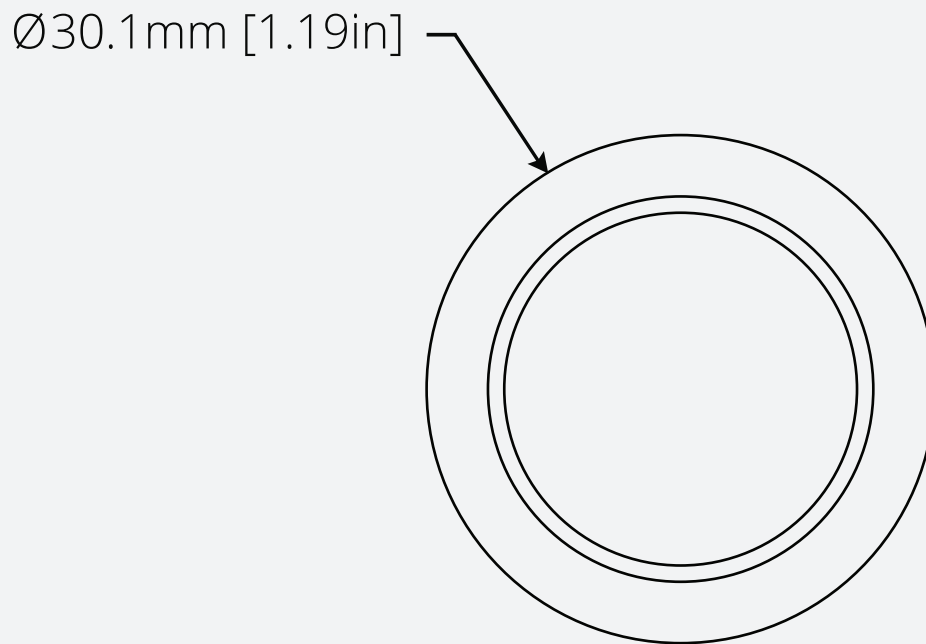

Vista reserves the right to modify this specification without prior notice.

INSTALLATION INSTRUCTIONS


PREPARATION: Keep the following in mind:

- Disclaimer: Drill holes at your own risk
- The following tools are required for this installation: 20.96mm [0.825in] Hole Saw
- Verify the location for the light to be installed. Choose a location that is distanced away from any high temperature heat source. It is suggested that intended mounting location is measured prior to installation to ensure proper fitment.
- Verify that there is a clear path for the power wires to be routed from the assembly to the power source.

WIRING: Route wires as necessary for the application. Do not pinch or puncture wires with fasteners. Do not route wires around sharp edges. The use of a wire loom is suggested for protection if wires are to be routed through areas where they may encounter sharp edges, in an application that would experience high amounts of vibration, in areas that may have fasteners protruding into them during later assembly, or other extreme conditions.

Determine the wiring configuration used on the product.

- 2 Wire Version (1 Power / 1 Ground)



FASTENING:

1. Umbra lights can be installed by simply press fitting the light into a properly sized hole.

DISCONNECT POWER SOURCE (BATTERY) BEFORE STARTING ELECTRICAL WORK.

Recommended methods for splicing wires together (*parts not included in Vista product kits*):

- Solder and cover bare wires with heat shrink or electrical tape.
- Insulation-displacement connector (IDC) / insulation-piercing contact (IPC).
- Twist on wire connector, "wire nut".
- Crimp connector, "Butt splice".

WARNING:

1. Supply current and wattage must not exceed the rated values on the specification documents.
2. Incorrect polarity or improper wiring may cause personal injury and/or damage to the product. It is recommended that an electrical technician, professional, or similarly qualified individual finish wiring.
3. To avoid electrical shock risk, all failures should be examined by a qualified technician.
4. Environmental suitability, including but not limited to water resistance, varies based on product design. Unless explicitly noted, products are to be installed in a location shielded from outdoor elements. To avoid irreparable damage, refer to specification sheets to locate products in a proper environment.
5. Do not install products near an open flame or in high temperature environments unless the product is explicitly designed to function as such. Adversely, do not install products in excessively cold environments unless explicitly designed to function as such. Refer to product spec sheets/drawings for information about minimum and maximum operating temperatures.
6. Vista Manufacturing Inc. is not liable for any injuries or damage caused due to improper wiring or installation.

Vista reserves the right to modify this specification without prior notice.
