

# COMPARTMENT LIGHTING

- Bright, thin, connectable lighting
- 12" Standard length
- IP68
- UV and salt fog tested
- Exceeds lumen recommendation of NFPA 1901
- Operating voltage: 13.8VDC
- Operating temperature: -4 to 176°F




## SPECIFICATIONS


PART NUMBER	VOLTAGE	CURRENT (mA)	WATTAGE (W MAX)	CCT (K)	LUMINOUS FLUX (lm)
470257	12 Vdcm	232	3.7	6,500	258

## DIMENSIONS

### TOP VIEW

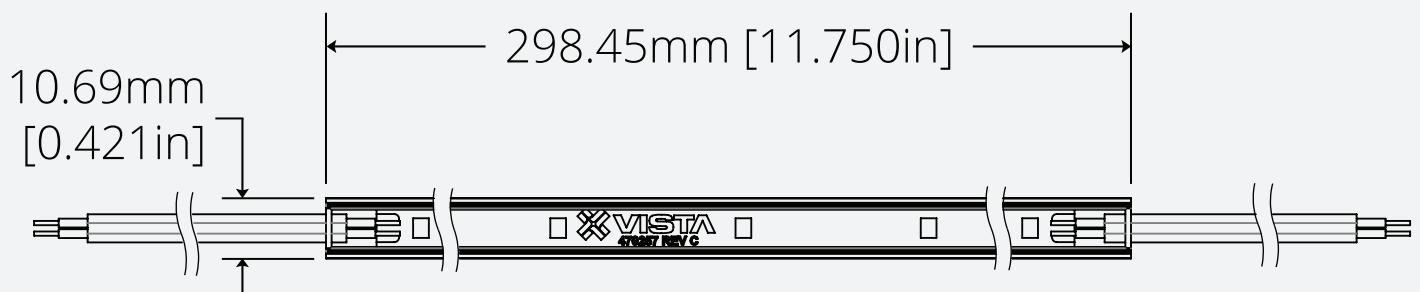

## SIDE VIEW

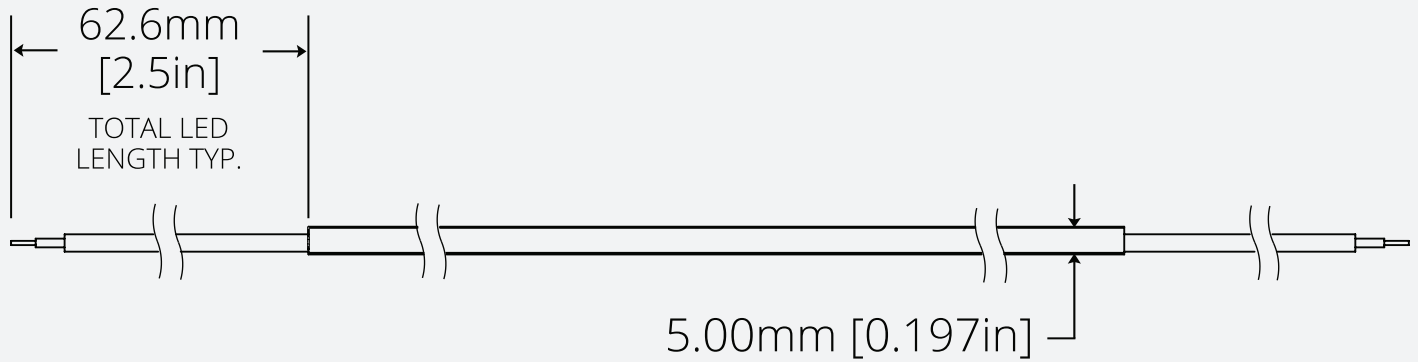

## INSTALLATION INSTRUCTIONS

**PREPARATION:** Keep the following in mind:


- Verify the location for the light to be installed

**FASTENING:** Mount the light in the intended mounting location.

- Adhesive (included on backside of product)
  1. Clean the mounting surface before installing the product
  2. Peel the protective film off the 3M adhesive found on the back side of the product
  3. Adhere the product to the mounting surface and press firmly to ensure proper adhesion

**WIRING:** Determine the wiring configuration used on the product

- 2 Wires (1 Power / 1 Ground)



**NOTE:** When connecting lights in series, do NOT exceed a total current draw of 3 amps.

**DISCONNECT POWER SOURCE (BATTERY) BEFORE STARTING ELECTRICAL WORK.**

Recommended methods for splicing wires together (*parts not included in Vista product kits*):

- Solder and cover bare wires with heat shrink or electrical tape.
- Insulation-displacement connector (IDC) / insulation-piercing contact (IPC).
- Twist on wire connector, "wire nut".
- Crimp connector, "Butt splice".

Vista reserves the right to modify this specification without prior notice.

**WARNING:**

1. Supply current and wattage must not exceed the rated values on the specification documents.
2. Incorrect polarity or improper wiring may cause personal injury and/or damage to the product. It is recommended that an electrical technician, professional, or similarly qualified individual finish wiring.
3. To avoid electrical shock risk, all failures should be examined by a qualified technician.
4. Environmental suitability, including but not limited to water resistance, varies based on product design. Unless explicitly noted, products are to be installed in a location shielded from outdoor elements. To avoid irreparable damage, refer to specification sheets to locate products in a proper environment.
5. Do not install products near an open flame or in high temperature environments unless the product is explicitly designed to function as such. Adversely, do not install products in excessively cold environments unless explicitly designed to function as such. Refer to product spec sheets/drawings for information about minimum and maximum operating temperatures.
6. Vista Manufacturing Inc. is not liable for any injuries or damage caused due to improper wiring or installation.

---

*Vista reserves the right to modify this specification without prior notice.*

---