


A Description

The Vista RGBW Flexi-Tape offers RGB and White light output from a single LED chip; this allows a greater range of color mixing options and uses.

Product Features:

- Even LED RGB color and white lighting
- Available in IP20, IP65 and IP68 rating
- Channel/clip and tape mounted options
- Available in custom lengths, and 30 / 60 RGBW LEDs per meter
- Suitable for all markets

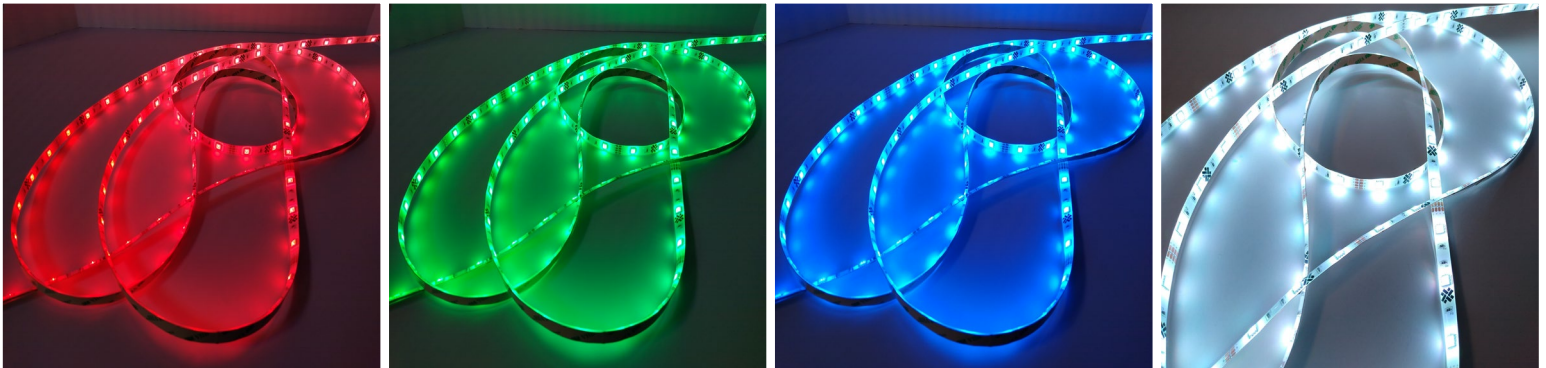

B Specifications

POWER

Operating Voltage	11 to 14 Vdc
Test Voltage	13.8 Vdc
Power	0.93 Watts Max
Drive Current / Set	22 mA / Color

OPERATING TEMPERATURE

-20 TO 60°C

COLOR REQUIREMENTS / SET

COLOR	WAVELENGTH / CCT	LUMINOUS FLUX ± 10%
Red	620 – 636	8
Green	515 – 530	20
Blue	460 – 470	5
White	5500 – 6500	27

IP RATING

IP20, IP65, IP68

WORKMANSHIP

IPC-A-610 CLASS 2


COMPLIANCE

ROHS 2 Compliant
UL Category Code (CCN): IFDR, IFDR7




C Dimensions

Drawing Shown Below for IP68

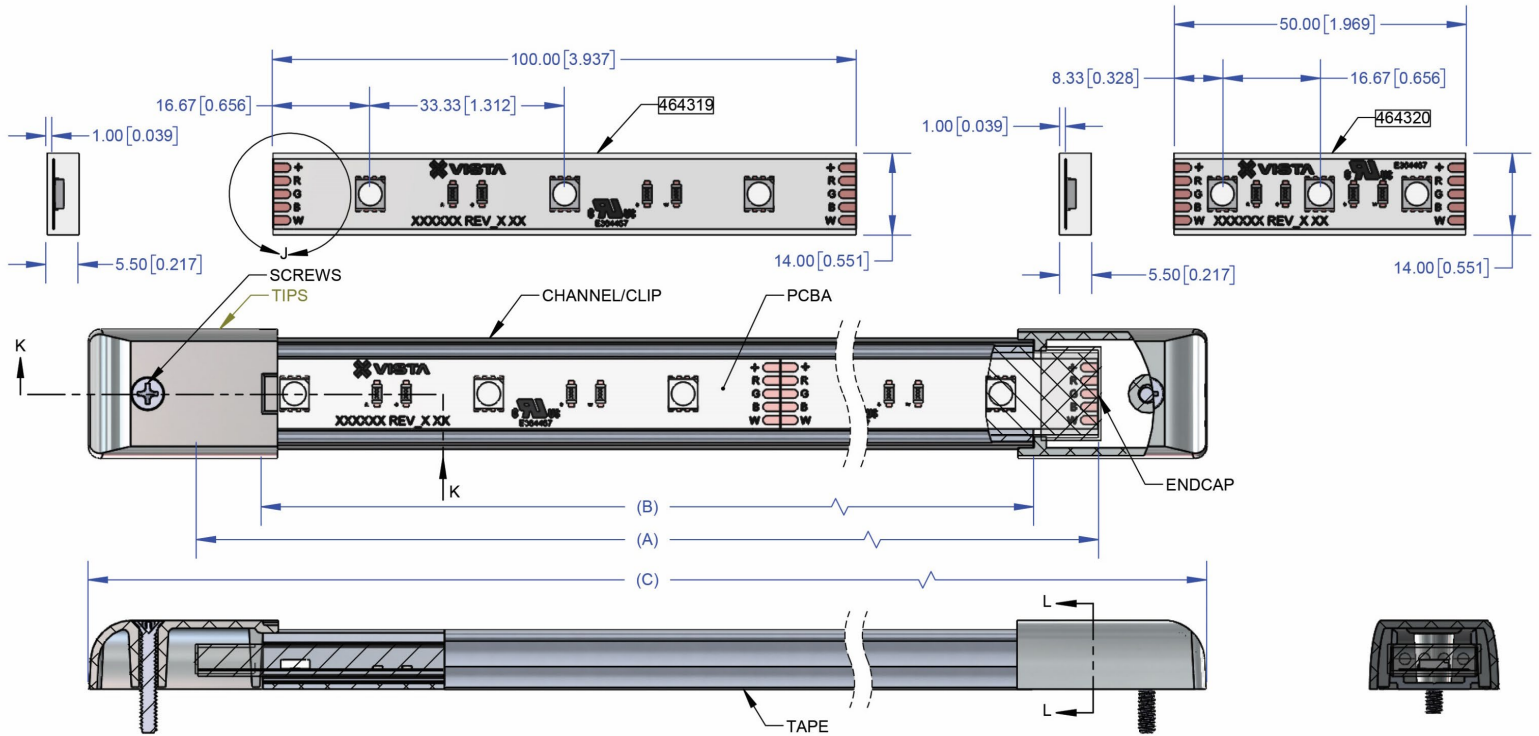

WIRE COLOR (FUNCTION):

- BLACK (+12V)
- RED (RED GND)
- GREEN (GREEN GND)
- BLUE (BLUE GND)
- WHITE (WHITE GND)

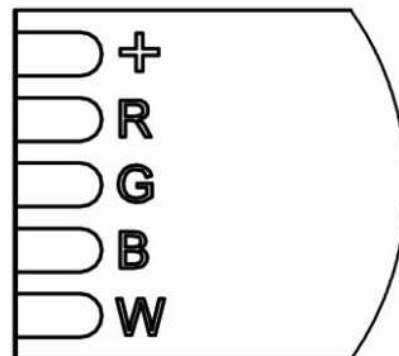

Figures not to scale – mm [in]

